

AC 700

Cummins
Mecc Alte
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	700,00	560,00	638,00	510,00	920,00

fPQDE

GC,) &

,) & z

fDF DE

%\$i

%

%&

GC" \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

TRANSFER SWITCH

!

!

!

!

!

!

!

!

!

!

fl

!

!"

fl

"

!

E

fPQ \$\$\$ \$\$\$

E

fl

!" \$ E

AC 700

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		VTA 28 G5		
		%\$\$' "# "		
		*%&\$\$' "		
		Q &\$\$< DQ		
	L	28,000		
	"	140 x 152		
		13,1:1		
	fl # 7	"# "	1500	
	fl 7	L	83,00	
		L	170,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	52,68		
	' # "	651,00		
fl ' # 7	' # "	122,88		
	° C	507,00		
		24 V d.c.		
	Load	%\$\$i	'+) i) \$i
	# "	140,00	104,00	73,00

		Mecc Alte
		ECO 40-2L
	Hz	50
	"	680,00
7cg'		0,80
		3
	fl 7	400/230
	A	981,00

		fl 7		fl 7	
	"	"	"	"	L
AC 700	5470,00	3740,00	1550,00	2266,00	1000,00
		fl 7		fl 7	
	"	"	"	"	L
MS 85	7030,00	5297	1606	2656	1000

AC 700

Cummins
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

ž

AC 700

Cummins
Mecc Alte
D+ & "

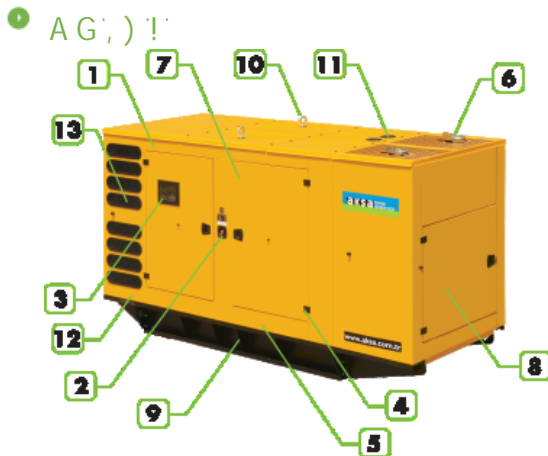

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000